


PROPPA® WALL SUPPORTS

INSTRUCTIONS FOR USE

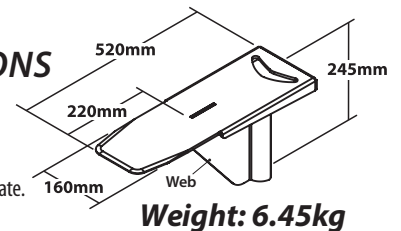

PLEASE NOTE: These instructions for use relate ONLY to the NEW Proppa design, Aust. Reg. Des. 343806, that was launched in July 2012. This new design incorporates a boomerang-shaped hand slot in the top plate. The old design is differentiated by a handle affixed to the top plate.

1. Determine the opening height. Rake or grind out the mortar joint one or two bricks above the joint in which you are working to ensure that the Proppa® has clearance and will slide into the clean joint until the web of the Proppa® is against the face of the wall. Under no circumstances should you hammer in the Proppa® as this can cause cracking!
2. Once the Proppa® is in position, locate the prop ensuring that the prop is plumb when it is tightened. **NOTE:** "If you are supporting a double skin wall & the mortar joints don't line up, carefully insert a steel wedge between the top loading plate of the Proppa® and the underside of the brickwork to be supported. The steel wedge shall be of the same width as the top loading plate of the Proppa®."
3. Take up the load on the prop, **DO NOT OVER-TIGHTEN! THIS IS NOT A JACKING DEVICE!**
4. For appropriate safe working load please refer to the table immediately below to determine maximum safe working load & height.

Acrow® Prop Type	Min. Prop Height (mm)	WLL (kg)		Max. Prop Height (mm)	WLL (kg)	
		Single Skin	Cavity		Single Skin	Cavity
NO. 0	1300	570	460	1830	360	290
NO. 1	1850	550	440	2800	330	270
NO. 2	2150	540	440	3400	310	250
NO. 3	2420	530	440	3975	290	240
NO. 4	3350	500	410	4900	280	230

NOTES

- a. Table is based on 110mm brickwork with load eccentricities to centreline of prop given below.
- b. Assumed eccentricity for single skin - 270mm (web against inside face of brickwork)
- c. Assumed eccentricity for cavity - 350mm (web against inside face of brickwork)
- d. Adequate restraint must be maintained at the top of the masonry wall – eg. slab, floor, roof pitching beam and ceiling frame, and must be at a height not greater than 500 mm above the prop.

5. Ensure that the floor or foundation is capable of providing adequate bearing capacity for the base of the props without settlement or sliding.
6. The lateral stability at the base plate is achieved by friction between steel and concrete. For other materials, ensure an engineer checks that there's adequate resistance to slip.
7. Consider the effects of loading on multiple levels in respect of load transfer to props and foundation at the bottom level.
8. Ensure an engineer has checked the adequacy of the masonry wall containing the proposed opening before any work commences, including lateral resistance at the prop level during its use.
9. When using the Proppa® wall support with hollow masonry, ensure the unit is installed so that the outermost face-shell is supported. For practical purposes, this limits the thickness of hollow masonry walls to 190 mm blockwork.
10. The prop must be oriented such that the slot in the outer tube (and holes in the inner tube) are in line with the wall, ie. **not** facing the wall.
11. The Proppa® wall support must be installed on the inner tube of the prop only. Ensure this is taken into account when selecting a prop to suit the head height. Allow minimum 250mm of inner tube above the top thread of the outer tube.
12. If there's any settlement or movement of the masonry wall during the process of installing the Proppa® wall supports, removing masonry units, installing the lintel and removing the props, check for any cracking in the masonry and conduct repairs as necessary.
13. The Proppa® wall support is designed for standard masonry bed joints of nominal 10 mm thickness. Refer to an engineer for guidelines on use with masonry laid in thin-bed mortar.
14. The maximum spacing of Proppa wall supports is 900 mm.
15. If the prop visibly deflects, brace it and have an engineer assess its use.
16. Always use PROPPA® wall supports in a safe and workmanlike manner.

DON'T TAKE RISKS • ALWAYS CONSULT A STRUCTURAL ENGINEER FOR PROPPA® GUIDANCE

17. **General care and safety issues**

- Use Personal Protective Equipment when working with PROPPA®
- Always comply with OH&S / Work, Health & Safety regulations and any local or site-specific requirements.
- Never use PROPPA® beyond its design limitations.
- Always keep PROPPA® clean and in good working order.
- Handle PROPPA® with care and store safely. Use hand slot only when carrying, keeping hands clear at all other times.

SUPPORT THE WALL THE PROPPA® WAY™

Acrow® is the registered trademark of Acrow Formwork & Scaffolding Pty Ltd (Acrow) | © Enertron Pty Ltd / Proppa Tools Pty Ltd 2012. All rights reserved. JULY 2012
The good faith reference to Acrow® above should not be taken to suggest or imply any affiliation with or endorsement or sponsorship by Acrow.

www.proppatools.com